


3Z24

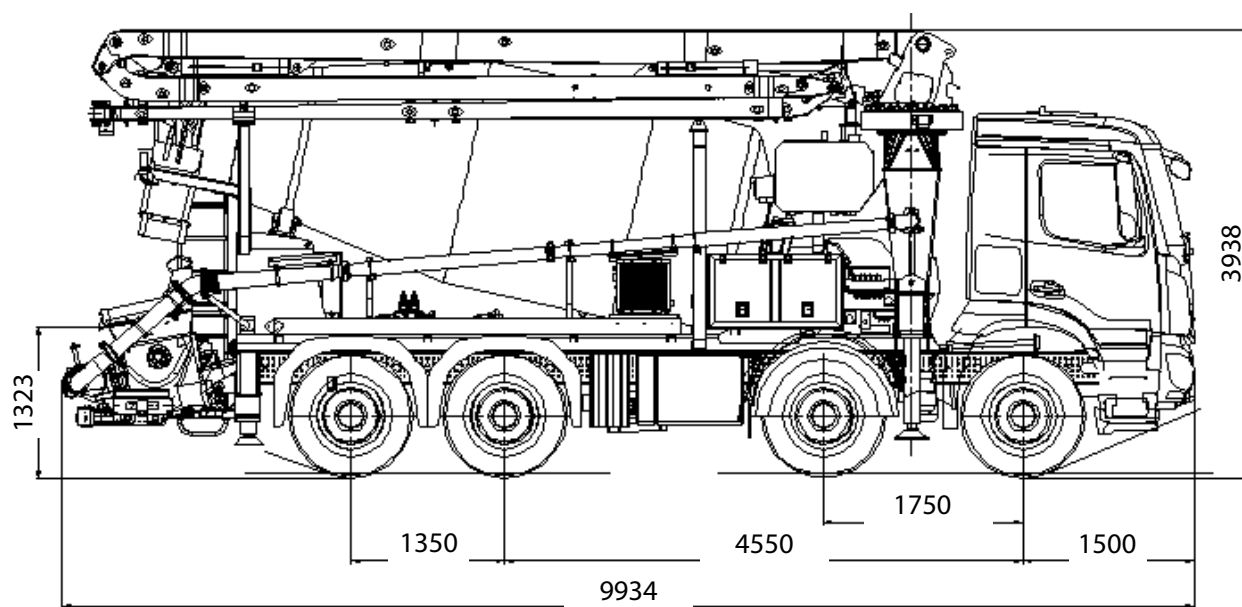

DIMENSIONS ARE INFORMATIVE AND DEPEND ON THE TRUCK COMPOSITION CHOSEN

PUMPING UNIT XJG5320

MAX. CONCRETE FLOW RATE*	60 M ³ /H
MAX. CONCRETE PRESSURE*	75 BAR
MAX. NUMBER OF STROKES	31/MIN
STROKE LENGTH	1000 MM
DIAMETER OF CONCRETE CYLINDER	200 MM
HOPPER CAPACITY	500 L


*THE DATA GIVEN ARE THEORETICAL VALUES
AND CANNOT BE REACHED SIMULTANEOUSLY.

MIXER DRUM 8,5 M³

NOMINAL CAPACITY	8,5 M ³
GEOMETRIC VOLUME	12,0 M ³
ROTATION SPEED	0 - 15/MIN
WATER COUNTER	0 - 500 L
MATERIAL	QSTE 500®




- POWERED BY PTO TRANSMISSION OF THE TRUCK
- S-VALVE MADE OF WEAR-RESISTANT STEEL
- WEAR RING AND WEAR PLATE WITH COMPENSATION SYSTEM (INLAY OF TUNGSTEN CARBIDE STEEL)
- ELECTRIC DRIVEN AND TEMPERATURE CONTROLLED
- MIXING SHAFT WITH REMOVABLE BLADES (HARDOX®)
- AUTOMATIC GREASE LUBRICATION SYSTEM, HYDRAULICALLY DRIVEN
- DOUBLE-WALLED EXIT BEND 5" WITH CLEANING ACCESS
- CONCRETE CYLINDER WITH HARD CHROME INNER WALL
- SIMPLE STRUCTURED, OPEN HYDRAULIC SYSTEM
- ELECTRO-HYDRAULIC CONTROLLED PUMPING UNIT
- SEPARATE CONTROL FOR PUMPING AND S-VALVE CYLINDERS SUPPORTED WITH ACCUMULATOR
- FUEL-SAVING FLOW AND SPEED CONTROL
- VARIABLE DISPLACEMENT PUMP, PRESSURE FLOW CONTROLLED



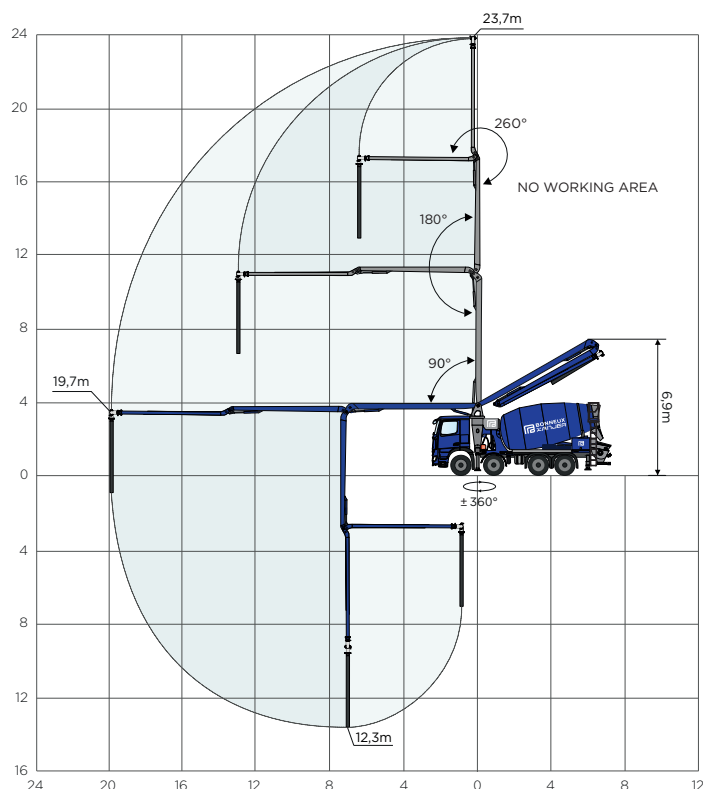


BOOM 3Z24


MATERIAL	HIGH-STRENGTH STRUCTURAL STEEL
STRENGTH CALCULATION	FEM ANALYSE
FOLDING SYSTEM	TYPE 'Z'
NUMBER OF SECTIONS	3
MAX. VERTICAL RANGE	23,7 M
MAX. HORIZONTAL RANGE	19,7 M
MAX. DEPTH RANGE	12,3 M
MIN. UNFOLDING HEIGHT	6,9 M
ROTATION ANGLE	± 360°
TURNING ANGLES	90°- 180°- 260°
CONTROL VALVE	PROPORTIONAL
MAX. HYDRAULIC PRESSURE	315 BAR
PIPELINE	Ø 4" (DN 100)
END HOSE	Ø 4" (DN 100) - 3 M

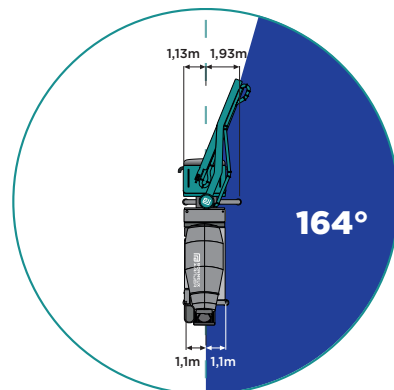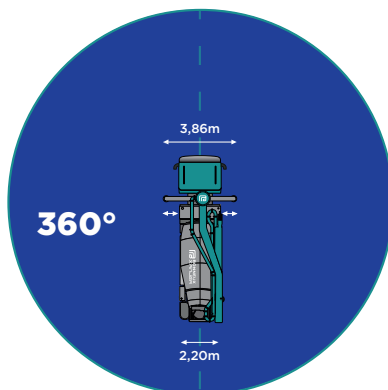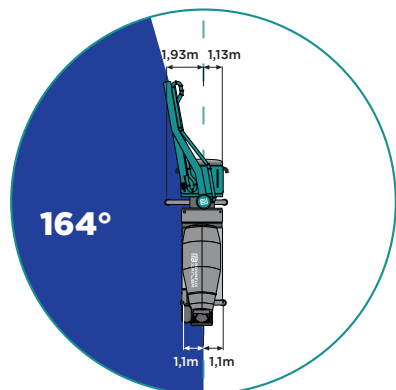

RADIO REMOTE CONTROL
2 TRANSMITTERS + 1 RECEIVER



HYDRAULIC PUMPS

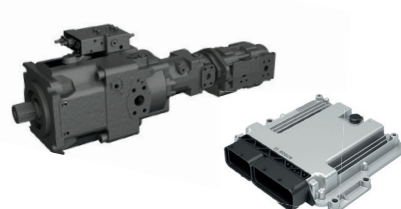

HYDRAULIC PUMPS
ELECTRONIC CONTROL UNIT
BODAS HARDWARE
CONTROLLER RC SERIES

OUR PRODUCTS ARE CONSTANTLY EVOLVING, WHICH MEANS SPECIFICATIONS MAY VARY